


PRESSURE MEASUREMENT IN HIGH PRESSURE REGULATOR Kit
#220507D (range = 0-4.5 PSI)

Diversified Kit for 0-6 psi Gauge w/needle = 2205221

Diversified duckbill gromet and plastic cap = 2205446

- Keep the needle clean and in upright position.
- Insertion of the needle not in upright position can cause damage to the rubber adapter.
- Lubricate the needle connected to the pressure gauge with small amount of silicone grease. (2205221).
- Do not connect the pressure gauge to regulator during flushing.
- At the end of the test remove the needle from the regulator.
- There is no need for a pressure gauge for each regulator, only one is required per house/farm.

- After measurement, a few drops of water may emerge from the sealing cap, this is normal and will stop on its own after a short while.

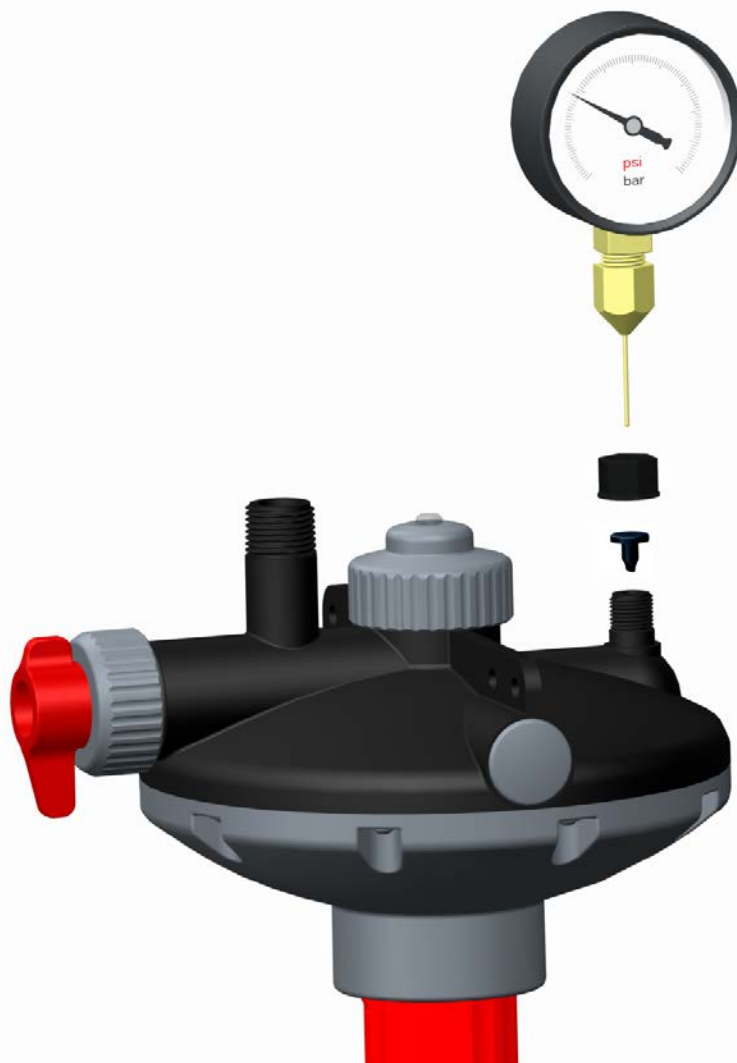

Instructions for installation / replacement rubber adapter for pressure gauge whit needle

- Lubricate the rubber adapter with small amount of silicone grease (220902L15).
 - Insert the rubber adapter to the 1/4" nipple that on the regulator.
 - Close and Tight slightly the perforated cap (2209028).
-
- Before measurement Lubricate the needle connected to the pressure gauge with small amount of silicone grease.

