

- eliminates "hot spot"
- Improved growth rates
- No hot spots for maximum comfort of penned animals
- Reduced crowding
- Single or two stage control capability
- Best reliability in harsh environments
- Anti-corrosion construction
- Sealed maintenance-free blower motor
- Low clearances above reflector assures it is safe for plastic drop ceilings and feed lines
- Nickel plated "Jet Stream" burner cup
- High efficiency, maximum energy is
- delivered to the floor
- Optional "Flapper" to prevent cold air infiltration


FINISH OPTIONS





Stainless Steel

Galvanized Steel

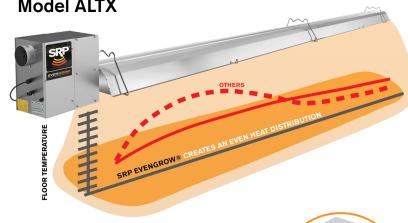



The "Flapper" Optional Hinged Vent Terminal



SPECIFICATIONS

SRP EVENGROW® MODEL ALTX, LOW EVEN HEAT TWO STAGE RADIANT AGRICULTURAL HEATER

MODEL NG OR LPG	RATE BTU/HR	LOW FIRE RATE BTU/HR	(FEET)	ELECTRICAL RATING 120 VAC 60 Hz 1A 60" grounded plug connector	GAS CONNECTION 1/2" NPT
ALTX-60	60,000	45,000	30	TUBE DIAMETER Combustion air 4" Flue 4"	MINIMUM GAS INLET
ALTX-80	80,000	60,000	40		Natural gas 5.0" W.C.
ALTX-100	100,000	75,000	50		LPG gas 11.5" W.C.

STANDARD EQUIPMENT INCLUDES

- Sealed burner housing assembly c/w potted ignition module
- Aluminized tubing with gasket
- · Combustion air inlet collar
- · Turbulators when required
- All tube, reflectors, couplings, end caps and hanging accessories as per specified length

OPTIONAL EQUIPMENT

- · Burner box available in stainless steel or galvanized
- · Reflectors available in aluminum or marine grade aluminum
- The "Flapper" hinged vent terminal
- Standard vent terminal
- U or L bends for specific layouts
- · Side reflectors and brackets
- Lower shields and brackets
- Thermostats, 24v or 120v
- Chain kits

DIMENSIONS (Inches) 15" 120" Typical Maximum flue vent length allowed, 30 ft.

CLEARANCES TO COMBUSTIBLES (Inches)

MODEL		ALTX 60			ALTX 80			ALTX 100	
Configuration	Тор	Side	Below	Тор	Side	Below	Тор	Side	Below
Straight-Horizontal	2	4	31	2	4	31	2	6	36
Straight-45° Tilt	3	3-18	18	3	3-18	18	4	3-20	20
U-Tube Horizontal	2	4	32	2	4	32	2	6	38

- · Other layout configurations are approved
- · Side reflectors and lower shields are available
- · Lower clearances are allowable at 25' from burner
- · See installation manual for complete information





All models are CSA approved.



Diversified Agriculture LLC 556 Industrial Way West Eatontown, NJ 07724 1-800-348-6663 info@diversifiedag.com DiversifiedAg.com

NOT TO SCALE